

6G SFP+ Transceiver

MTRS-6E31-01



Features

- Up to 15KM transmission distance
- Support Multi Rate 3.072-6.144Gbps
- 1310nm DFB and PIN receiver
- SFI electrical interface
- 2-wire interface for integrated Digital Diagnostic Monitoring
- SFP+ MSA package with duplex LC connector
- Hot pluggable
- Very low EMI and excellent ESD protection
- +3.3V power supply
- Power consumption less than 1.0W
- Operating case temperature: -40~+85°C

Applications

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes
- LTE optical repeater application

Compliance

- Compliant with IEEE 802.3ae-2002
- Compliant with MSA SFF-8472
- Compliant with MSA SFF-8431

Description

MTRS-6E31-01 is a high performance, cost effective modules, which is supporting Multi Rate 3.072-6.144Gbps, and transmission distance up to 15km on SM fiber. The transceiver consists of two sections: The transmitter section incorporates a 1310nm DFB Laser and a driver. The receiver section consists of a PIN photodiode integrated with a transimpedance preamplifier (TIA) and a Limiting Amplifier. The module is hot pluggable into the 20-pin connector. The high-speed electrical interface is base on low voltage logic, with nominal 100 Ohms differential impedance and AC coupled in the module.

The optical output can be disabled by LVTTTL logic high-level input of TX_DIS. Transmit Fault (Tx_Fault) is provided to indicate that the module transmitter has detected a fault condition related to laser operation or safety. Loss of signal (RX_LOS) output is provided to indicate the loss of an input optical signal of receiver. A serial EEPROM in the transceiver allows the user to access transceiver monitoring and configuration data via the 2-wire SFP Management Interface. This interface uses a single address, A0h, with a memory map divided into a lower and upper area. Basic digital diagnostic (DD) data is held in the lower area while specific data is held in a series of tables in the high memory area.

Specification

Absolute Maximum Ratings				
Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _s	-40	+85	°C
Supply Voltage	V _{CC3}	0	3.6	V
Relative Humidity(Non-condensing)	RH	0	85	%
RX Input Average Power	P _{max}	-	1.5	dBm

Recommended Operating Conditions					
Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T _c	-40	25	+85	°C
Power Supply Voltage	V _{CC3}	3.13	3.3	3.47	V
	I _{CC3}	-	-	300	mA
Power Dissipation	P _D	-	-	1.0	W
Data Rate		3.072	-	6.144	Gbps
Transmission Distance		-	-	15	Km

Transmitter Operating Characteristic-Optical, Electrical						
Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Centre Wavelength	λ _c	1285	1310	1355	nm	Note1
Side Mode Suppression Ratio	SMSR	30	-	-	dBm	
Laser Off Power	P _{off}	-	-	-30	dBm	
Average Optical Power	P _{avg}	-5.2	-	0.5	dBm	Note1
Extinction Ratio	ER	3.5	-	-	dB	
Transmitter Dispersion Penalty	TDP	-	-	3.2	dB	
Relative Intensity Noise	R _{in}	-	-	-128	dB/Hz	
Optical Return Loss Tolerance		12	-	-	dB	
Operating Data Rate		3.072	-	6.144	Gbps	
Optical Eye Mask		FC-PI-4, rev. 8-138v1,				Note2
Optical Modulation Amplitude	OMA	290			uW	
Tx Input Diff Voltage	V _I	180	-	700	mV	
Tx Fault	V _{oL}	-0.3	-	0.4	V	At 0.7mA
	V _{oH}	2.4		V _{cc}		
Jitter deterministic @ γ _t	J _{pk-pk}			0.21	UI	Note2
Jitter total @ γ _t BER<10 ⁻¹²	J _{pk-pk}			0.38	UI	Note2
Spectral Width@-20dB	Δλ	-	-	1	nm	

Notes:

[1] Average optical power shall be measured using the methods specified in TIA/EIA-455-95.

[2] achieved with worst case jitter stress at t, Jitter total @ t, BER<10⁻¹² = 0.28UI (informative)

Receiver Operating Characteristic-Optical, Electrical						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Center Wavelength	λ_r	1270	1310	1360	nm	
Receiver Sensitivity	Psens	-	-	-14.4	dBm	
Receiver Sensitivity In OMA		-	-	-14.4	dBm	
Stressed Receiver Sensitivity In OMA		-	-	-10.3	dBm	Note1
LOS Assert	LosA	-30	-	-	dBm	
LOS Dessert	LosD	-	-	-16	dBm	
LOS Hysteresis	LosH	0.5	-	-	dB	
Overload	Pin	0.5	-	-	dBm	
Operating Data Rate		3.072	-	6.144	Gbps	
Rx Output Diff Voltage	Vo	350	-	850	mV	
Jitter deterministic @ δ_r	DJ			0.28	UI	
Jitter total @ δ_r BER<10⁻¹²	TJ	-	-	0.49	UI	
Receiver Reflectance		-	-	-12	dB	

Notes:

[1] Receiver sensitivity is informative. Stressed receiver sensitivity shall be measured with conformance test signal for BER = 1×10^{-12} .

Digital Diagnostic Functions

Parameter	Symbol	Min.	Max.	Unit	Note
Temperature monitor absolute error	DMI_Temp	-3	3	°C	Over operating temp
Laser power monitor absolute error	DMI_TX	-2	2	dB	
RX power monitor absolute error	DMI_RX	-2	2	dB	
Supply voltage monitor absolute error	DMI_VCC	-0.1	0.1	V	
Bias current monitor absolute error	DMI_Ibias	-10%	10%	mA	

Control and Status I/O Timing Characteristics

Parameter	Symbol	Min.	Max.	Unit	Note
TX Disable Assert Time	t_off	-	100	μs	Note1
TX Disable Negate Time	t_on	-	2	ms	Note2
Time to initialize including reset of TX_Fault	t_init	-	300	ms	Note3
TX Fault Assert Time	t_fault_on	-	1	ms	Note4
TX Fault Reset Time	t_reset	10	-	μs	Note5
LOS Assert Time	t_loss_on	-	100	μs	Note6
LOS Deassert Time	t_loss_off	-	100	μs	Note7

Notes:

- [1] Time from rising edge of TX Disable to when the optical output falls below 10% of nominal
- [2] Time from falling edge of TX Disable to when the modulated optical output rises above 90% of nominal
- [3] From power on or negation of TX Fault using TX Disable
- [4] Time from fault to TX fault on
- [5] Time from TX fault to TX nominal
- [6] Time from LOS state to RX LOS assert
- [7] Time from non-LOS state to RX LOS deassert.

Pin-out Definition

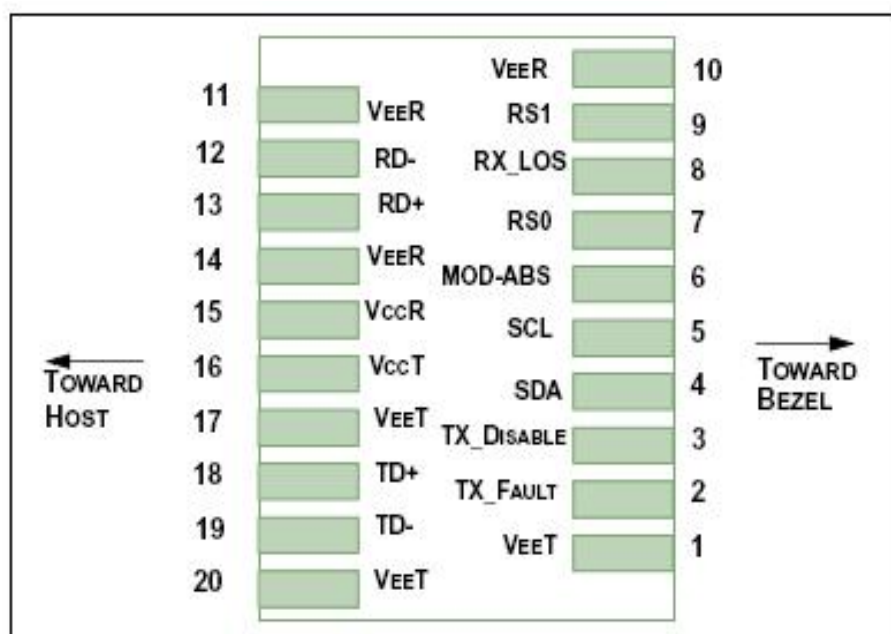


Figure1

Pin Assignment

Pin	Logic	Symbol	Name/Description	Note
1		VeeT	Module Transmitter Ground	Note1
2	LVTTL-O	TX_Fault	Module Transmitter Fault	Note2
3	LVTTL-I	TX_Disable	Transmitter Disable; Turns off transmitter laser output	Note3
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i)	Note4
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i)	Note4
6		MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	Note5
7	LVTTL-I	RS0	Not used	
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect)	Note2
9	LVTTL-I	RS1	Not used	

10		VeeR	Module Receiver Ground	Note1
11		VeeR	Module Receiver Ground	Note1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	Note1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	Note1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	Note1

Notes:

- [1] The module signal ground pins, VeeR and VeeT, shall be isolated from the module case.
- [2] This pin is an open collector/drain output pin and shall be pulled up with 4.7k-10kohms to Host_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5 V.
- [3] This pin is an open collector/drain input pin and shall be pulled up with 4.7k-10kohms to VccT in the module.
- [4] See SFF-8431 4.2 2-wire Electrical Specifications.
- [5] This pin shall be pulled up with 4.7k-10kohms to Host_Vcc on the host board.

Block Diagram of Transceiver

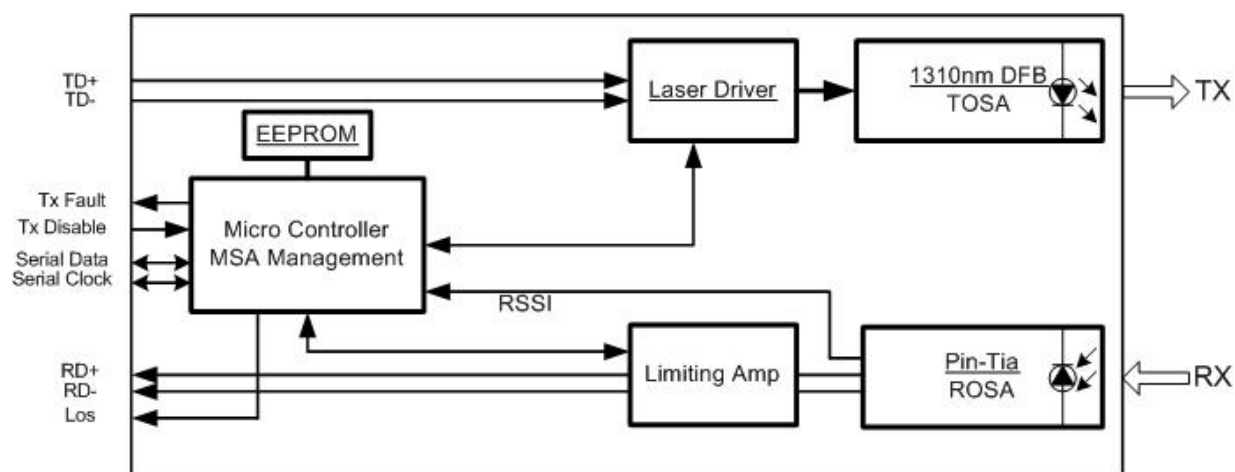


Figure2

Transmitter Section

The transmitter converts 6.25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 6GBASE-LR standard. An open collector compatible Transmit Disable (Tx_Dis) is provided. A logic "1," or no connection on this pin will disable the laser from transmitting. A logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx_Fault) is provided. TX_Fault is a module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 kΩ. TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP+ module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor

Receiver Section

The receiver converts 6.25Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the SFP+ is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

Recommended Interface Circuit



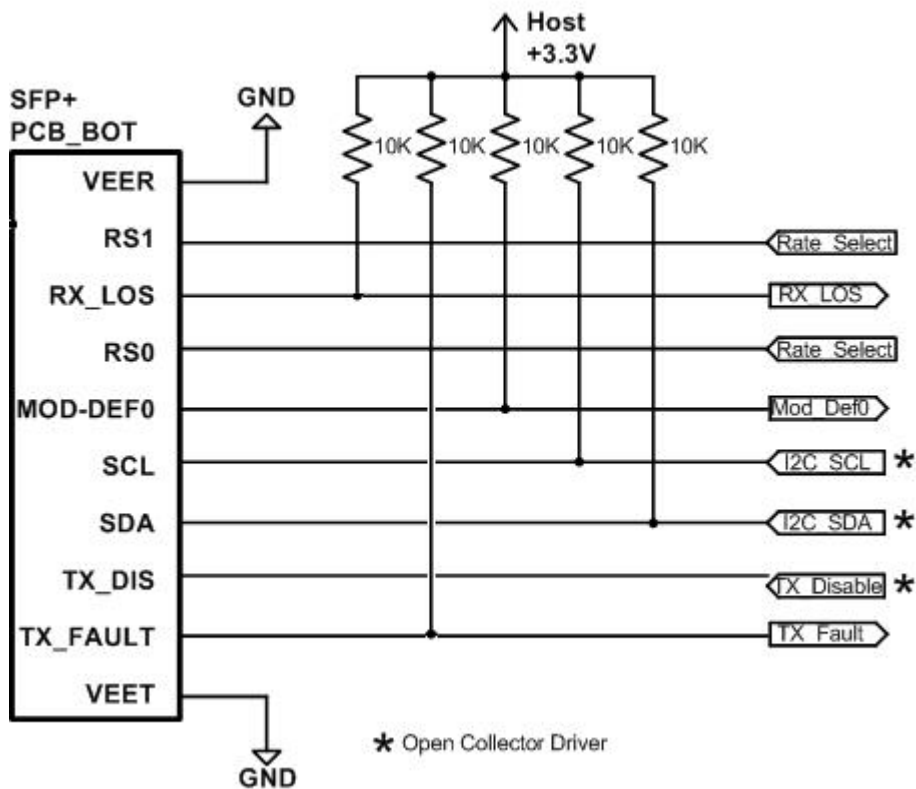


Figure3


Dimensions

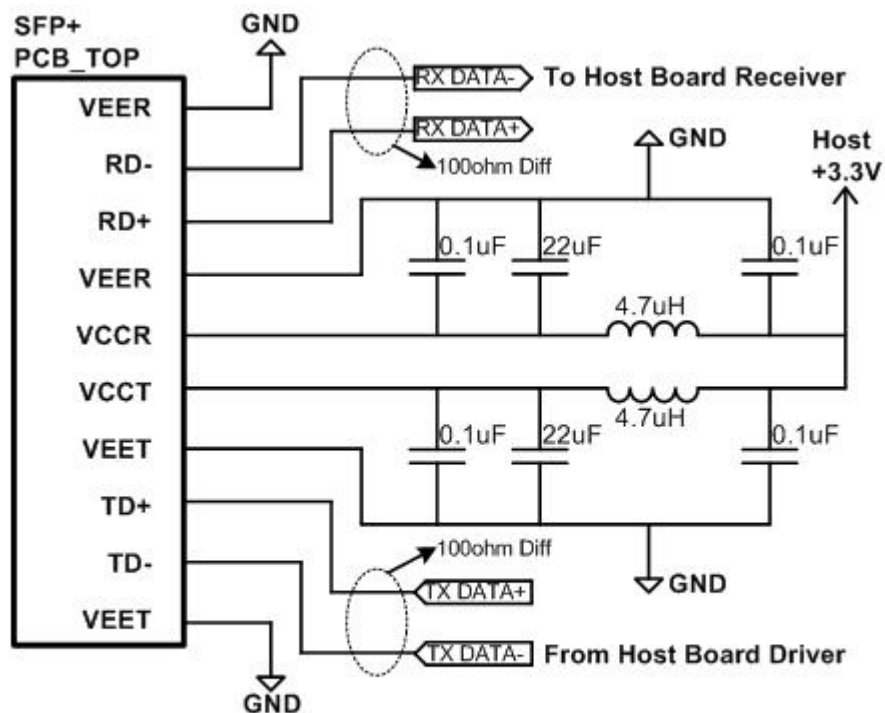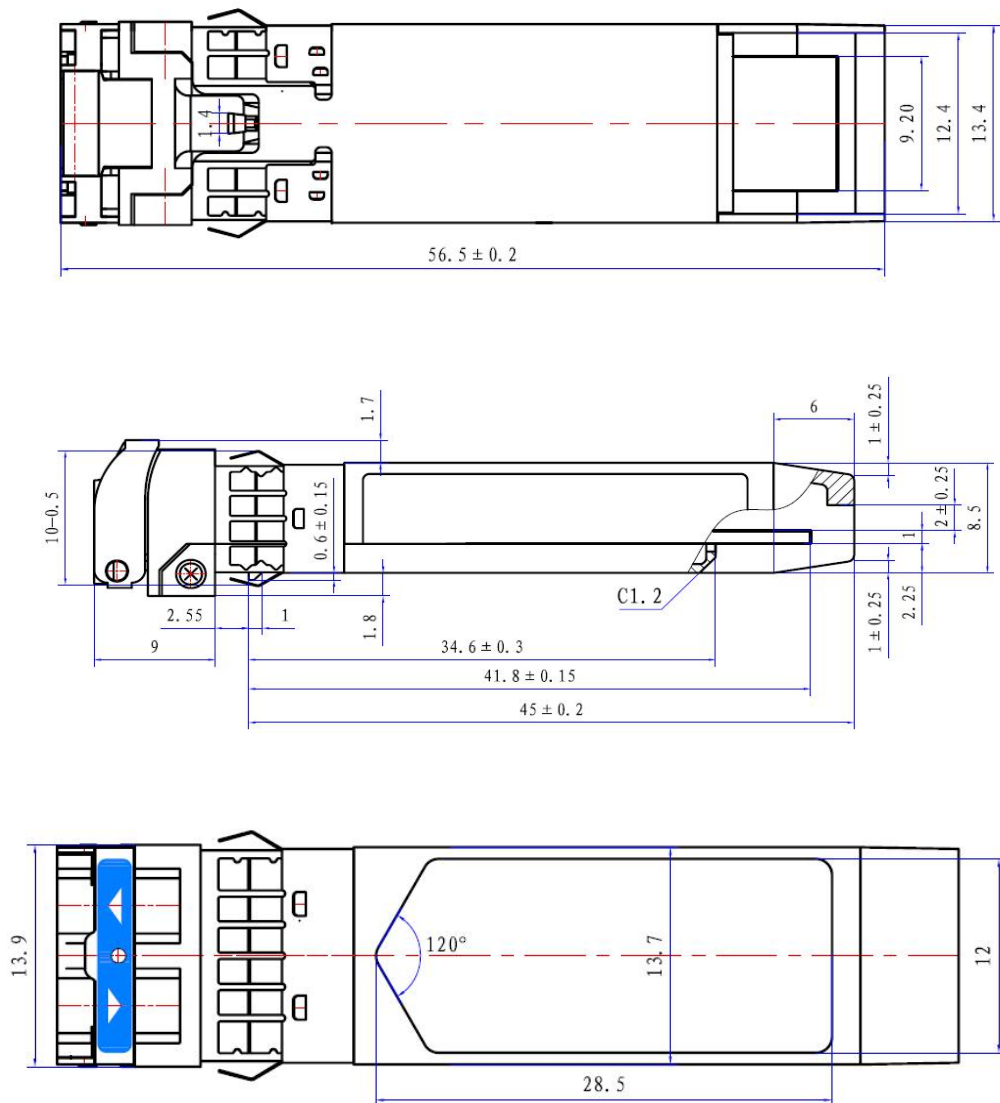

Tolerance: X.X ± 0.10 X.XX ± 0.05 X.XXX ± 0.01

Figure4

Digital Diagnostic Memory Map

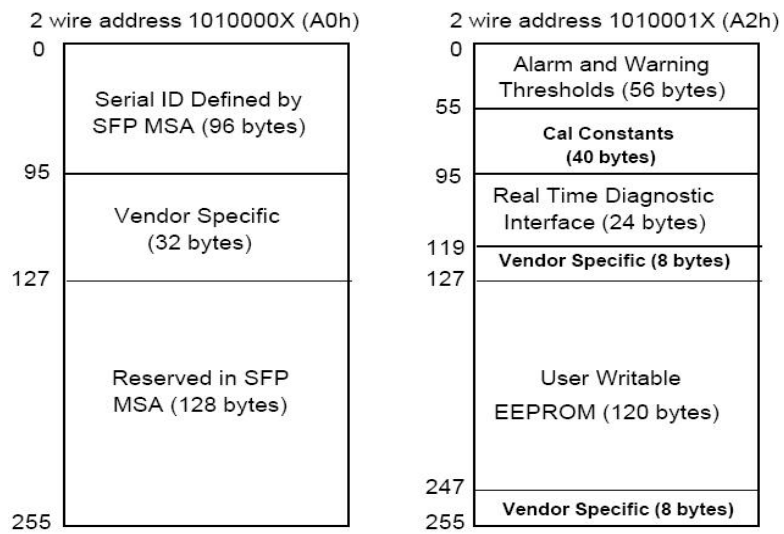

Ordering Information

Part No.	Specification								
	Pack	Rate	Tx	Pout	Rx	S	Top	Reach	Others
MTRS-6E31-01	SFP+	6G	1310nm DFB	-5.2—0.5dBm	PIN	<-14.4dBm	-40~85℃	15km	DDM/RoHS

Contact Information

Wuhan Huagong Genuine Optics Technology Co., Ltd

Address: Science & Technology Region of HUST, Donghu High-Tech Zone

Wuhan, Hubei Province, 430223, China

- **Tel: +86-27-87180102**
- **Fax: +86-27-87180220**

Email: market@genuine-opto.com

Website: <http://www.genuine-opto.com> www.sfp.by

Statement

HG Genuine possesses the authority for ultimate explanation of all information contained in this document, which is subject to change without prior notice. All the information was obtained in specific environments; and HG Genuine will not be responsible for verifying the products performance in customers' operating environments, neither liable for the performance of users' products. All information contained is only for the users' reference and shall not be considered as warranted characteristics. HG Genuine will not be liable for damages arising directly or indirectly from any use of the information contained in this document.

Publishing Date: 2016-12-05

Copyright © HG Genuine
All Right Reserved