

# 10Gb/s 10Km CDR SFP+ 1310nm Transceivers



## Features

- Compliant to SFP+ MSA
- Fully RoHS Compliant
- All metal housing for superior EMI performance
- IPF compliant mechanics (SFF-8432 Rev 5.0)
- CDR with 9.95 to 11.3Gbps
- Uncooled DML DFB Laser
- High sensitivity PIN photodiode and TIA
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption <1.5W
- -5°C to 70°C operating wide temperature range
- Single +3.3V±5% power supply
- Digital Monitoring SFF-8472 Rev 10.4 compliant
- Real time monitoring of:  
Transmitted optical power  
Received optical power  
Laser bias current  
Temperature  
Supply voltage

## Applications

- SONET OC-192 SR-1&SDH STM I-64.1
- 10GBASE-LR/LW
- 10G Fiber Channel

The uncooled 1310nm DML laser based 10Gigabit SFP+ Transceiver is designed to transmit and receive serial optical data over single mode optical fiber with 10Km.

They are compliant with SFF-8431,SFF-8432, 10GFC Rev 4.0, IEEE 802.3ae 10GBASE-LR/LW, Telcordia GR-253-CORE OC-192 SR-1 and ITU-T G.691 STM-64 I-64.1. The transmitter converts serial CML electrical data into serial optical data compliant with the IEEE 802.3ae standard. The receiver converts serial optical data into serial CML electrical data. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

## Specifications

(Tc=-5 oC to 70 oC and Vcc= 3.14 to 3.46V)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Nominal Wavelength	$\lambda$	nm	1290		1330	
Side Mode Suppression Ratio	SMSR	dB	30			
Spectral Width(-20dB)	$\Delta \lambda$	nm			1	
Optical Output Power	Pav	dBm	-6		-1	
Extinction Ratio	ER	dB	6			
Transmitter and Dispersion Penalty	TDP	dB			1	1
Average Launch Power of OFF Transmitter	POFF	dBm			-30	
Eye diagram	Compliant with ITU-T G.691 eye mask					
Receiver						
Center Wavelength	$\lambda_C$	nm	1260		1610	
Receiver Sensitivity1	Sen1	dBm			-11	2,3
Receiver Sensitivity2	Sen2	dBm			-14.4	2,4
Overload		dBm	0.5			2
Receiver Reflectance	RL	dB			-14	
LOS Assert	LOSA	dBm	-30			2
LOS De-Assert	LOSD	dBm			-17	2
LOS Hysteresis		dB	0.5		6	2

**Note1:** With 10km G.652 SMF

**Note2:** Ber<10<sup>-12</sup>, 2<sup>31</sup>-1PRBS NRZ, 1310nm, ER=6dB

**Note3:** For SONET/SDH/OTN application

**Note4:** For Ethernet/Fiber Channel application

# 10Gb/s 10Km CDR SFP+ 1310nm Transceivers

## Ordering Information

Part No.	Specifications									Application
	Package	Data rate	Laser	Optical Power	Detector	Sensitivity	Temp	Reach	Other	
RTXM228-408	SFP+	Up to 11.3G	1310nm DML	-6 ~ -1dBm	PIN	< -11dBm	-5~70oC	10km	CDR	SDH I-64.1 10GBASE-LR/LW 10G Fiber Channel

## Block diagram

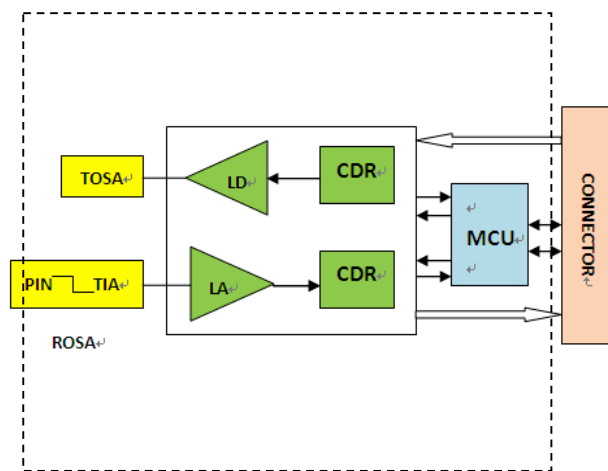


Figure 1. Transceiver functional diagram

## Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	°C	-40	85
Relative Humidity	RH	%	0	95

## Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature Range	Tc	°C	-5		70
Power Supply Voltage	Vcc	V	3.14	3.3	3.46
Bit Rate	BR	Gb/s	9.95		11.32
Bit Error Ratio	BER				10 <sup>-12</sup>
Max Supported Link Length	L	Km			10

# 10Gb/s 10Km CDR SFP+ 1310nm Transceivers

## Electric Ports Definition

Parameter	Symbol	Unit	Min	Typ	Max	Note
Supply Voltage	$V_{CC}$	V	3.14	3.3	3.46	
Supply Current	$I_{CC}$	mA			450	
<b>Transmitter</b>						
Input Differential Impedance	$R_{IN}$	$\Omega$	80	100	120	
Differential Data Input	$V_{IN}$	mVp-p	120		850	
Transmit Disable Voltage	$V_{DIS}$	V	2		$V_{CCHOST}$	
Transmit Enable Voltage	$V_{EN}$	V	$V_{EE}$		$V_{EE}+0.8$	
Transmit Fault Assert Voltage	$V_{FA}$	V	2		$V_{CCHOST}$	
Transmit Fault De-Assert Voltage	$V_{FDA}$	V	$V_{EE}$		$V_{EE}+0.4$	
<b>Receiver</b>						
Differential Data Output	$V_{OD}$	mVp-p	400		800	
Output Rise Time	$t_{RISE}$	pS	24			
Output Fall Time	$t_{FALL}$	pS	24			
LOS Fault	$V_{LOSFT}$	V	2		$V_{CCHOST}$	
LOS Normal	$V_{LOSNR}$	V	$V_{EE}$		$V_{EE}+0.4$	

## Pin function definitions

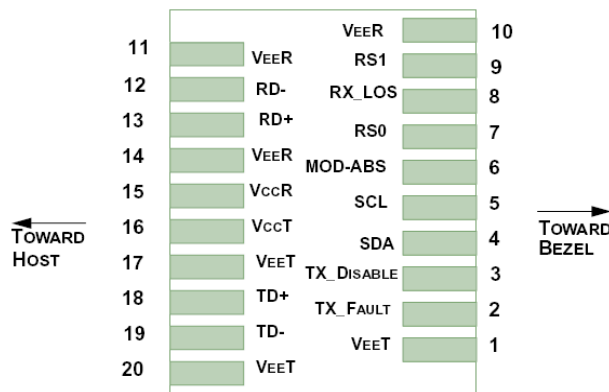


Figure 2. Pin function definitions

Table 1: Transceiver pin descriptions


Pin Number	Symbol	Name	Description
1,17,20	VeeT	Transmitter Signal Ground	These pins should be connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	Logic "1" Output = Laser Fault (Laser off before $t_{fault}$ ) Logic "0" Output = Normal Operation

# 10Gb/s 10Km CDR SFP+ 1310nm Transceivers


			This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
3	TX Disable	Transmitter Disable In (LVTTL)	Logic "1" Input (or no connection) = Laser off Logic "0" Input = Laser on This pin is internally pulled up to VccT with a 10 kΩ resistor.
4	SDA	Module Definition Identifiers	Serial ID with SFF 8472 Diagnostics
5	SCL		Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors.
6	MOD-ABS		
7	RS0	Receiver Rate Select (LVTTL)	These pins have an internal 30kΩ pull-down to ground. A signal on either of these pins will not affect module performance.
9	RS1	Transmitter Rate Select (LVTTL)	
8	LOS	Loss of Signal Out (OC)	Sufficient optical signal for potential BER < 1x10 <sup>-12</sup> = Logic "0" Insufficient optical signal for potential BER < 1x10 <sup>-12</sup> = Logic "1" This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
10,11,14	VeeR	Receiver Signal Ground	These pins should be connected to signal ground on the host board.
12	RD-	Receiver Negative DATA Out (CML)	Light on = Logic "0" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
13	RD+	Receiver Positive DATA Out (CML)	Light on = Logic "1" Output Receiver DATA output is internally AC coupled and series terminated with a 50Ω resistor.
15	VccR	Receiver Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
16	VccT	Transmitter Power Supply	This pin should be connected to a filtered +3.3V power supply on the host board. See Figure 3.Recommended power supply filter
18	TD+	Transmitter Positive DATA In (CML)	Logic "1" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.
19	TD-	Transmitter Negative DATA In (CML)	Logic "0" Input = Light on Transmitter DATA inputs are internally AC coupled and terminated with a differential 100Ω resistor.

# 10Gb/s 10Km CDR SFP+ 1310nm Transceivers

## Typical Application Circuit

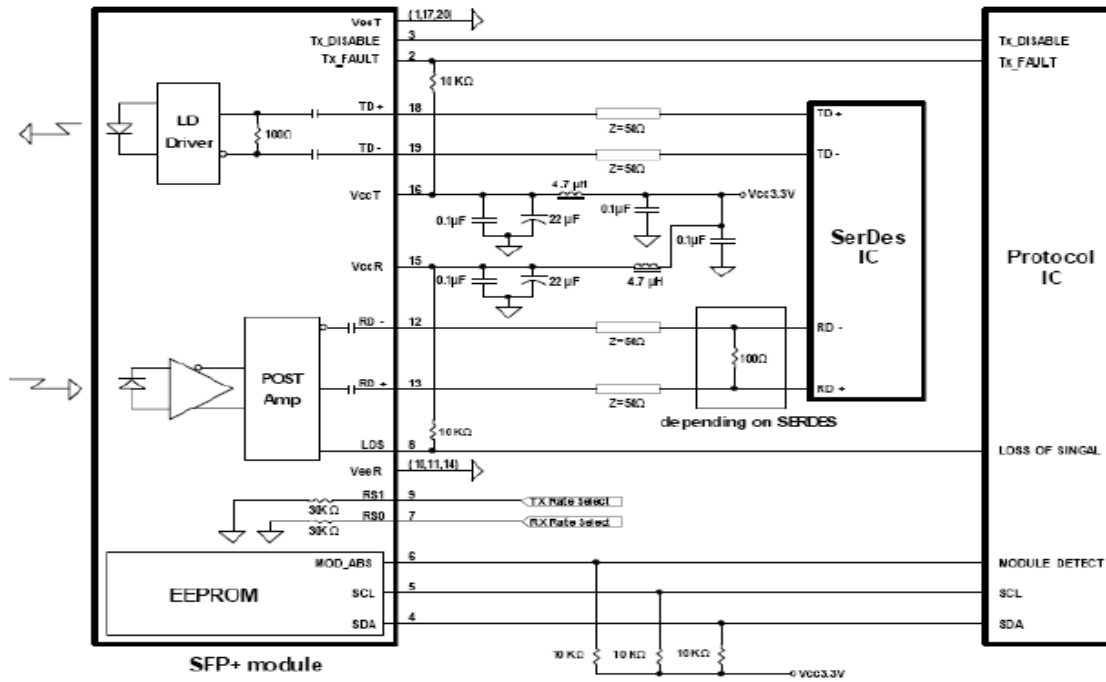

## Package Outline

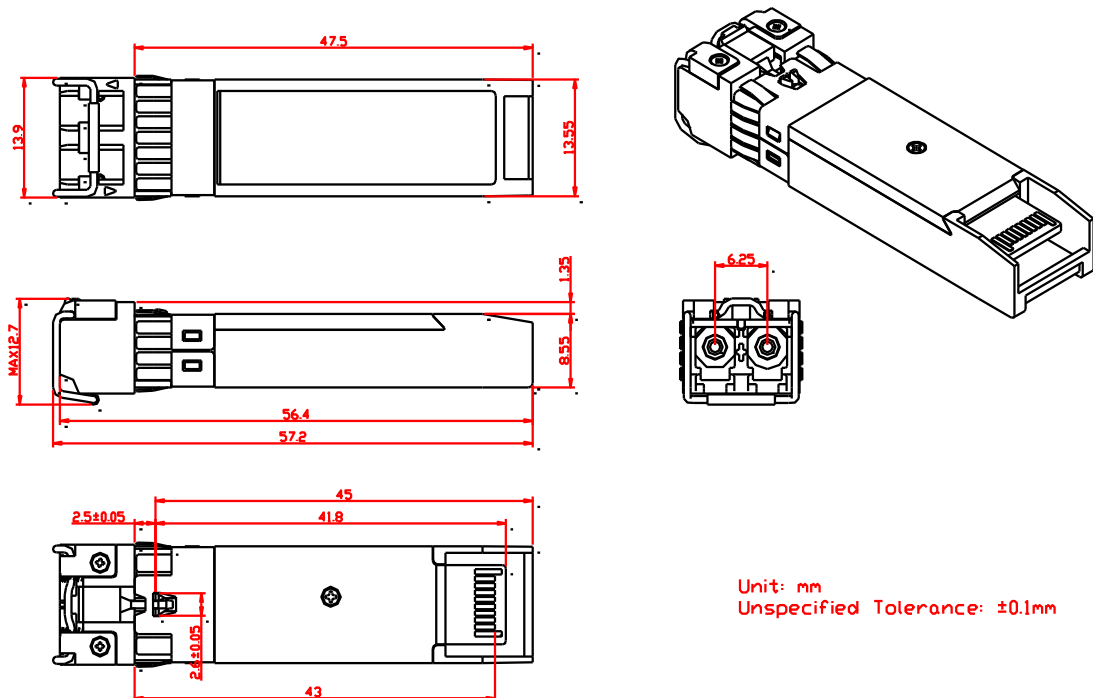

# 10Gb/s 10Km CDR SFP+ 1310nm Transceivers

## Regulatory Compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.7	Class 1 (> 1500 Volts)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	Variation of IEC 61000-4-2	Typically, no damage occurs with 15 kV when the duplex LC connector receptacle is contacted by a Human Body Model probe.
Electrostatic Interference (EMI)	CISPR22 ITE Class B EN55022 Class B FCC Class B	Compliant with standards
Immunity	IEC61000-4-3 Class 2 EN55024	Typically show no measurable effect from a 3V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure.
RoHS Compliance		Less than 1000 ppm of cadmium, lead, mercury, hexavalent chromium, polybrominated biphenyls, and polybrominated biphenyl ethers.

[www.sfp.by](http://www.sfp.by)